

Standard Incubator

Precise and stable operation
With optional real-time IoT monitoring



HZP-168

HFP-80

Scope of Application:

Widely used for bacteria, fungi and microorganism cell culture as well as enzyme digestion reaction, ligation reaction, embedded incubation and other related constant temperature experiments.

Innovative Design

- Multiple security protection
- Scalable bulk data storage
- Personalized interface
- High quality insulation and cabinet construction
- Large arc angle interior, easy to clean

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Ergonomic Design



Personalized interface, easy to link

Equipped with USB and RS485 interfaces to meet the different needs of users to transfer data.



Scalable bulk data storage

The touchscreen's memory can be increased to 64GB to store up to 15 years' data which can be exported via USB



Multiple protection benefits for increased security

Overheat protection (OPT), over current protection (FU), sensor error detection, independent temperature limit, compliance with DIN 12880 requirements and EU 3.1 safety level. Sound, light and remote alarms (optional) which guarantee experiment safety. Multiple alarms, such as over temperature alarm, high and low temperature alarm, door ajar, and sensor error alarm.



High thermal insulation performance, energy saving and environmental protection

The unit is manufactured with aluminum foil insulation cotton, which improves the overall insulation performance and reduces energy consumption, lowering costs while also being environmentally friendly.


Fuzzy PID Control Technology



HZP-168
Natural Convection



HFP-80
Forced Convection




ASTM standard,
12 points testing

Fuzzy PID control technology and high performance four-sided heating mechanisms are used to achieve precise temperature control with superior uniformity.


Rapid Recovery After Door Open

Rapid warming: the temperature inside the unit quickly recovers after opening the door to reduce the influence of temperature fluctuation on the sample.

The temperature rise curve to 37°C after opening the door for 30 sec at 22°C ambient temperature

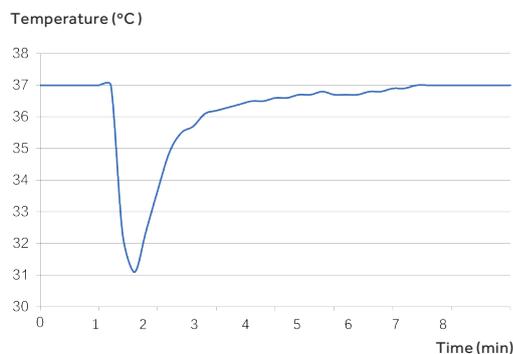

HZP-168


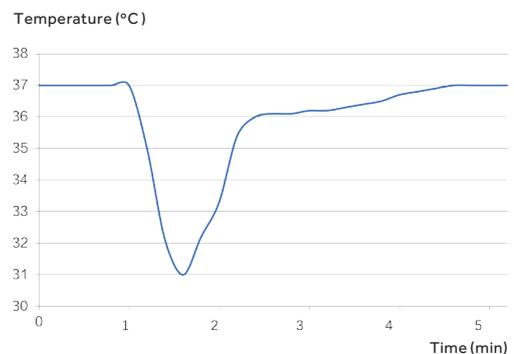


HFP-80



Precise Temperature Control, Energy-efficient and Environment-friendly



An energy-efficient model with superior control and heating mechanisms, high-quality insulation material and cabinet structure to ensure heating requirements are met while keeping power consumption to a minimum.

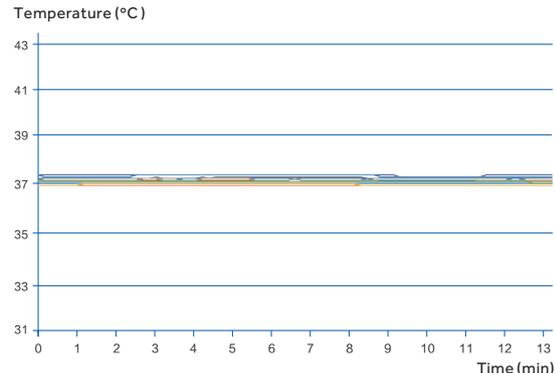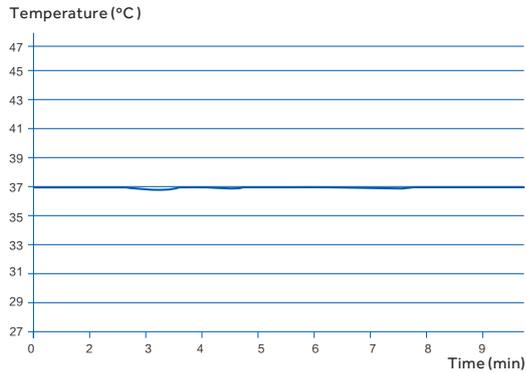

HZP-168

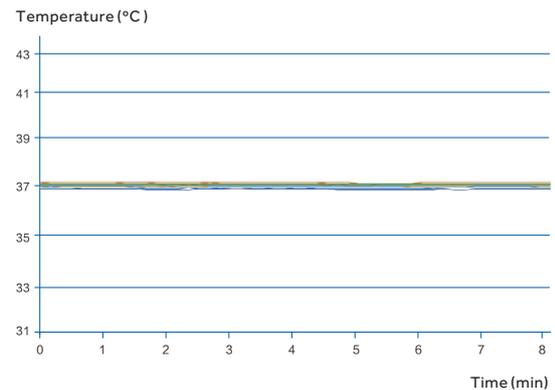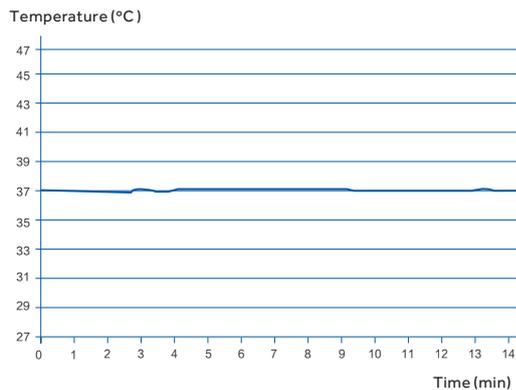

HFP-80

Convenient and Intelligent Management at a Glance



7-inch touchscreen, easy to operate and sensitive, it can respond quickly even when wearing rubber gloves.




Real-time display of temperature data, one-touch to review previous data.



Records abnormal information in real time, eliminating any hidden abnormalities which ensures the culturing is more secure.



Multiple operating modes.



The program can be edited and set at any number of segments to meet the needs of various detection tests.

Optional IoT Technology for Real-time Remote Monitoring



Through the mobile app, the status of the incubator can be checked in real time, and information such as temperature alarm, sensor error alarm and door ajar can be controlled with one button, which provides more security for the experiment process.

Pictures in Details



Seamless, curved internal chamber for easy cleaning and decontamination.



Standard independent intelligent temperature safety controller to ensure experimental safety; RS485 achieves seamless IoT data connection.

Product Parameters

Model	Product Series	Capacity (L)	Power (W)	Exterior Dimensions (W*D*H)(mm)	Interior Dimensions (W*D*H)(mm)	Packing Dimensions (W*D*H)(mm)
HZP-168	Natural convection	168	640	650*782*1028	490*550*626	785*870*1198
HFP-80	Forced convection	80	510	560*662*870	400*400*480	704*722*1050

Shelves (Standard)	Temperature Control Range	Temperature Uniformity	Temperature Fluctuation (°C)	Temperature Control Precision (°C)	Recovery Time after 30 sec Door Opening (min)
2/17	RT+5-105°C	±0.5°C at 37°C	±0.1	±0.1	5
2/12	RT+5-105°C	±0.3°C at 37°C	±0.1	±0.1	2.5

Product appearance and specifications are subject to change without notice